


# NovaFlex<sup>®</sup> Hi-Flow<sup>™</sup> Dry-Release<sup>™</sup> Couplings 'HDC'

## HDC-CPL 4" Stainless Steel 316L

Dry-Release Coupler

PART ID: 8CPLSV04

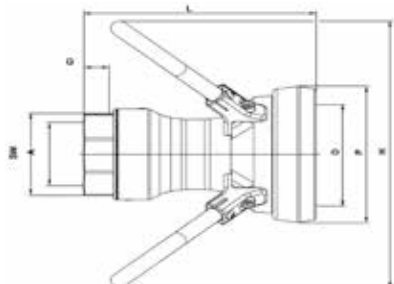


Material: Stainless Steel 316L

NPS Size	D Socket	A Connection	G Thread Length	L Length	P Protection Ring	H (with Handles)	Weight kg/lbs	Pressure
4"	164 mm	BSP ISO 228-G 4	24 mm/0.94"	295 mm/11.61"	210 mm	410mm	18.3 Kg/40.34 lbs	25bar/362psi
4"	164 mm	NPT ANSI B2.1	35 mm/1.38"	295 mm/11.61"	210 mm	410mm	18.1 Kg/39.90 lbs	25bar/362psi

## HDC-ADP 4" Stainless Steel 316L

Dry-Release Adapter

PART ID: 8ADPSV04

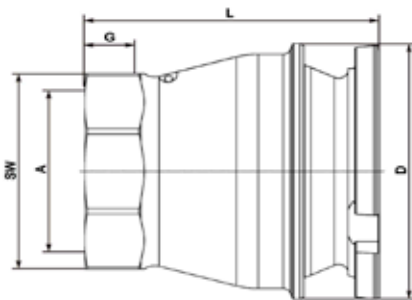

Material: Stainless Steel 316L

NPS Size	D Socket	A Connection	G Thread Length	L Length	Weight kg/lbs	Pressure
4"	164 mm	BSP ISO 228-G 4	24 mm/0.94"	156 mm/6.14"	6.9 Kg/15.21lbs	25bar/362psi
4"	164 mm	NPT ANSI B2.1	35 mm/1.38"	166 mm/6.53"	7.2 Kg/15.87lbs	25bar/362psi

Novaflex HDC<sup>™</sup> couplers and adapters equipped standard with Viton<sup>®</sup> seals. Other elastomers available upon request.